


## **Product Information**

Mod.R&S 06 | Rev.4 | Update 08/2019 | Page 1



## **COLORPRINT EXTRA**

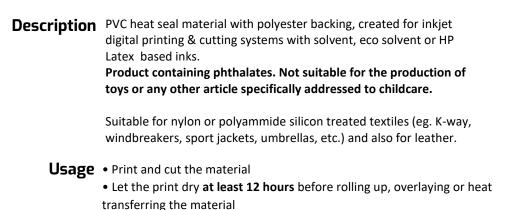

When printing on HP Latex plotter, set the drying temperature at 90°C

• Weed the exceeding material


• Remove the print from the polyester backing using Siser's TTD (adhesive, transparent and resistant to high temperatures)

- Heat apply at the conditions shown on the right
- Remove the application tape warm (in case of other application tapes,

follow specific instructions)

Washing Wait at least 24 hours from application before washing. Washing resistance up to 40°C, best inside-out. Do not use bleach or other aggressive chemical agents. Not suitable for dry cleaning. Not suitable for tumble dryer.

The product is REACH compliant



Suggested cutting settings Blade: 45° Pressure: 70 gf Speed: 20 cm/sec

Transfer settings 15 seconds at 165°C (330°F) medium pressure (3-4 bar)

Washing temperature

Dry cleaning

Tumble dryer



N.B. All information here contained are based on our experience. We recommend to perform a test before starting standard production. For best results we suggest to store the product away from sunlight and dust, in vertical position and at temperatures between 18°C and 26°C





www.tuv.com ID 9105027958

The product meets the Italian and EU regulations relating to its proper use, and to the (EU) regulation n. 1907/2006/EU REACH (Registration, Evaluation, Authorization and Restriction of Chemical substance). This document can be subject to variations. Updated versions are available on our website www.siser.com For further information, please contact our Sales Office.



Siser s.r.l. Viale della Tecnica, 18 36100 Vicenza - Italy

Tel. +39 0444.287960 Fax +39 0444.287959 info@siser.it - www.siser.com

r.e.a. vi 171856 reg. imp. vi n° 14971 c.s. € 103.300 i.v. p.iva 01591490246